UTTERMOST

STYLENO: 21233

Assembly Instruction

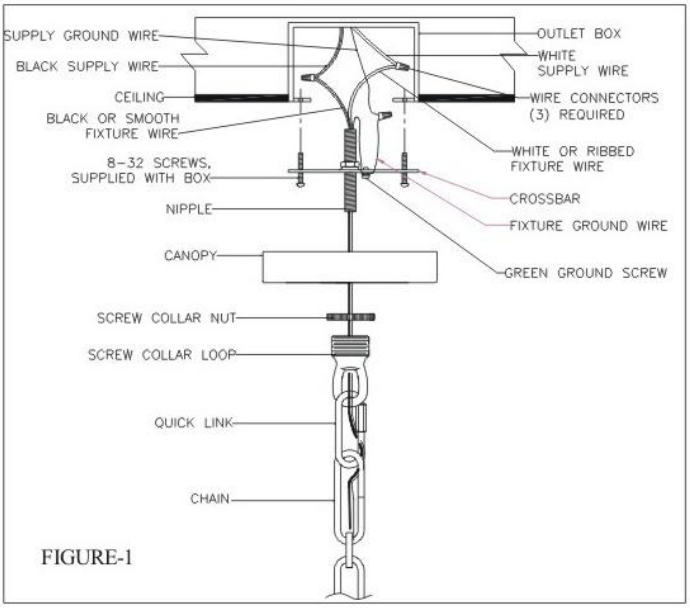

FIGURE-1



FIGURE-2-WireNut

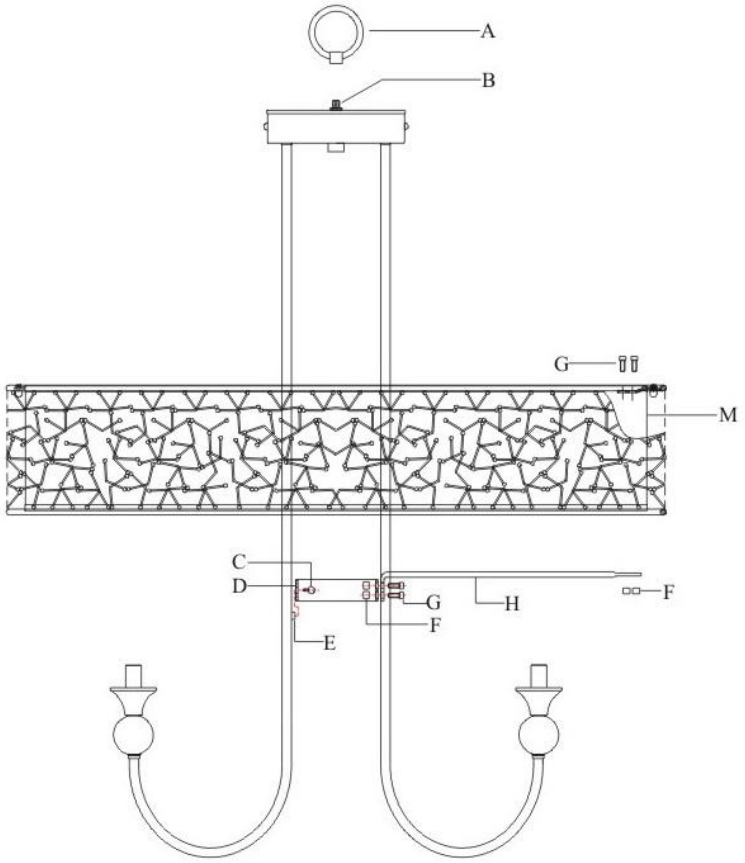

PO BOX 558 / 3325 GRASSY HILL RD. ROCKY MOUNT. VIRGINIA 24151
www.uttermost.com

UTTERMOST

STYLE NO: 21233 Parts and hardware list

1	Chain	7 FEET
2	Screw Collar Nut	1PC
3	Canopy	1PC
4	Nipple	1PC
5	8-32 Screws	2PCS
6	Cross Bar	1PC
7	Green Ground screw	1PC
8	Wire Nut	3PCS
9	Quick LINK	2PCS

Please m ɛm.
Please R ɛr lamp.

WARNING: BEFORE INSTALLING. make sure the electricity supply is shut off to avoid a possible electric shock

Assembly Instruction

1. Take the parts carefully out of the carton, place them on a flat surface, and make sure that the parts will not be damaged
2. Attach the Crossbar to the Outlet Box by using two 8-32 Screws (See Figure l)
3. Install the supply ground wire in the Crossbar with the Ground Green screw
4. Place the null wire, ribbed wire evenly against the ribbed wire from the outlet box and place the live wire, smooth wire evenly against the smooth wire from the outlet box. (Connecting the Wires-See Figure 2)
5. After the wires are connected, carefully place them inside the Outlet Box Attach the Canopy to the nipple and secure with Screw Collar Loop and Screw Collar Nut (See Figure 1)
6. Fasten the Cross Bar to the outlet box using the outlert box 8-32 Screws.
7. Insert the nipple into the pre-drilled hole in the Cross Bar and secuer with the washer and Hex Nut.
8. Attach the screw collar loop to the exposed and of the nipple and secure by turning in a clockwise direction.
9. Attach the quick link to the chain , then slip the screw collar nut frist and then Canopy over the other end of the chain to screw Collar Loop .
10. Attach the other Quick Link on other end of the chain to the loop on the top of Chandelier Assembly.
11. Place Canopy over the outlet box and secure with screw collar nut .
12. Screw the Loop (A) to the Nipple (B) until secure. There're five arms of this fixture, unfold the 5 arms, making sure the space between each arm is close.
13. Put the Round Metal Ring (D) to the inside of the Arm (E), then secure with Ball with thread (C), the step need to repeat 5 times
14. There're 5 pcs of lamp shade Supports (H) with one end in right angle and the other end in straight. Take one of the Supports (H), and then fix the right-angle end with the Round Metal Ring (D) by tightening the two Allen Screws and nuts (G and F). Repeat this step to assemble anoher 4 Lamp shades Supports.
15. Attach the Lamp shade (I) to the Lamp shades Supports (H), then fix it by screws (G) and Nuts (F).
16. Install 5*60 Watt type B bulbs (Bulbs not included)into the sockets of the fixture and the assembly is complete

Note: Please do not secure this end before lamp shade (I) is completely assembled.

PO BOX 558 / 3325 GRASSY HILL RD. ROCKY MOUNT. VIRGINIA 24151
www.uttermost.com